

DUAL MF

YUNIO

Foam Engine

Precision milk foam, perfected.



Engineered for Precision & Simplicity

Every detail considered. Every cup consistent.

Dual milk input

Two independent milk connections with solenoid valve control. Switch between milk types effortlessly.

Hot & cold foam

One-touch selection for hot or cold milk foam. Adjustable temperature and texture.

Automated cleaning

Built-in flush cycle keeps the milk system hygienic with minimal operator intervention.

Intuitive touchscreen

Select drinks, adjust settings, and monitor status — all from a responsive display.

Intelligent detection

Real-time milk temperature and level monitoring ensures stable, consistent production.

Professional gear pump

Powerful self-suction pump delivers excellent mixing and a perfectly smooth cup every time.



Specifications

Dimensions

Height	520 mm
Width	225 mm
Depth	560 mm
Weight	16 kg

Technical specifications

Power	2700 W
Voltage	220 - 240 V
Steam boiler	3 L
Water connection	Fixed
Water filter	Yes

Milk system

Hot foam	Yes
Cold foam	Yes
Milk variations	2
Steam pipe	Yes
Built-in flush	Yes

Various
milk options

Automatic
cleaning system

300
recommended daily cups




SEAMLESS INTEGRATION

One milk system. Every coffee setup.

The Dual MF works alongside the equipment you already own. Automatic milk foam preparation without changing your workflow.

HOW IT FITS YOUR BAR

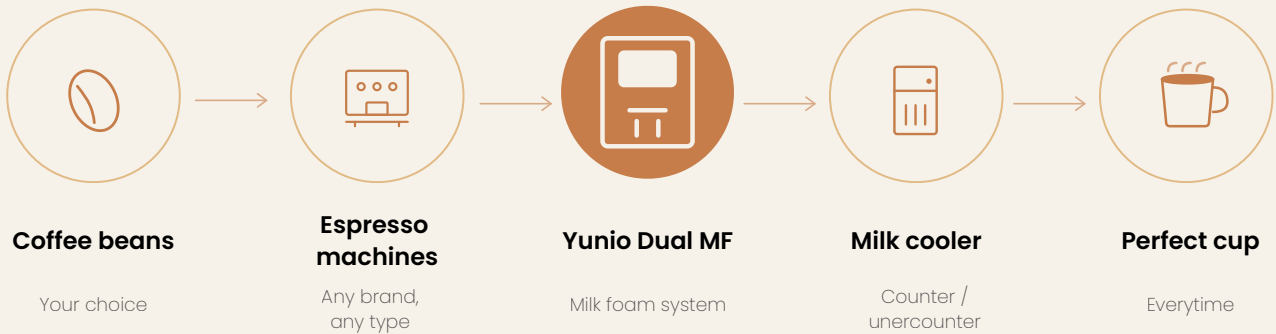

THREE WAYS TO SET IT UP



Pair with any espresso machine

Automatic milk foam alongside your existing setup. Traditional, semi-automatic, any brand.



Countertop milk cooler

Compact refrigeration next to the Dual MF. Milk kept fresh with easy daily access.



Undercounter milk cooler

Space-saving cabinet installation. Clean bar surface, reliable cooling hidden below.